


#### Model analysis:

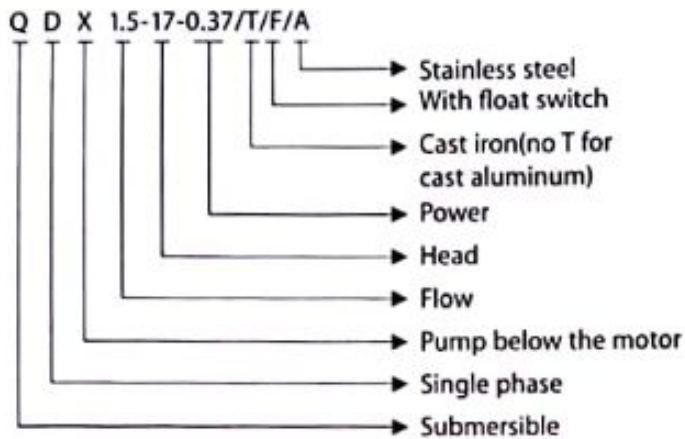

#### Application Area:

Clean water without abrasive particles  
Mainly used for well pumping, river pumping, flowing collection rain water, pumping water out from cellars, garages, basement.  
Water supply, drainage in breeding industry.

#### Operating Limits

Submersible depth: 5m  
Liquid temperature up to +40°C  
Grain size inlet: 2mm

#### Operating Limits

1. 2 pole induction motor.
2. Single-phase/Three-phase, 50Hz/60Hz
3. Insulation: class B
4. Protection: IP68
5. Single phase with capacitor and thermal overload protection.



QDX

QIFENG  
PUMP  
INDUSTRY

| Model          | Voltage V | Flow m <sup>3</sup> /h | Head M | Power KW | Pipesize mm |
|----------------|-----------|------------------------|--------|----------|-------------|
| QDX1.5-17-0.37 | 220V/380  | 1.5                    | 17     | 0.37     | 25          |
| QDX1.5-25-0.55 | 220V/380  | 1.5                    | 25     | 0.55     | 25          |
| QDX3-18-0.55   | 220V/380  | 3                      | 18     | 0.55     | 32          |
| QDX10-12-0.55  | 220V/380  | 10                     | 12     | 0.55     | 40          |
| QDX15-7-0.55   | 220V/380  | 15                     | 7      | 0.55     | 50          |
| QDX3-28-0.75   | 220V/380  | 3                      | 28     | 0.75     | 25          |
| QDX1.5-32-0.75 | 220V/380  | 1.5                    | 32     | 0.75     | 25          |
| QDX7-18-0.75   | 220V/380  | 7                      | 18     | 0.75     | 40          |
| QDX10-16-0.75  | 220V/380  | 10                     | 16     | 0.75     | 50          |
| QDX15-10-0.75  | 220V/380  | 15                     | 10     | 0.75     | 65          |
| QDX40-7-1.1    | 220V/380  | 40                     | 7      | 1.1      | 80          |
| QDX1.5-38-1.1  | 220V/380  | 1.5                    | 38     | 1.1      | 25          |
| QDX7-26-1.1    | 220V/380  | 7                      | 26     | 1.1      | 40          |
| QDX10-22-1.1   | 220V/380  | 10                     | 22     | 1.1      | 50          |
| QDX15-15-1.1   | 220V/380  | 15                     | 15     | 1.1      | 65          |
| QDX45-9-1.5    | 220V/380  | 45                     | 9      | 1.5      | 80          |

