


Model analysis:



Application Area:

Clean water without abrasive particles
 Mainly used for well pumping, river pumping, flowing collection rain water , pumping water out from cellars, garages, basement.
 Water supply, drainage in breeding industry.

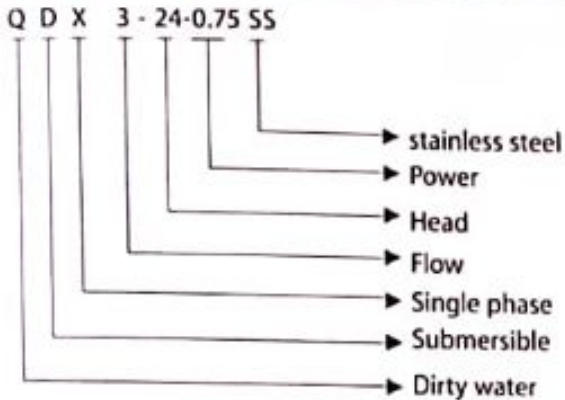

Operating Limits

Submersible depth: 5m
 Liquid temperature up to +40°C
 Grain size inlet: 2mm

Operating Limits

1. 2 pole induction motor.
2. Single-phase/Three-phase,50Hz/60Hz
3. Insulation: class B
4. Protection: IP68
5. Single phase with capacitor and thermal overload protection.

Model	Voltage V	Flow m ³ /h	Head M	Power KW	Pipesize mm
QDX3-24-0.75SS	220/380	3	24	0.75	25
QDX10-17-0.75SS	220/380	10	17	0.75	50