




1

4"

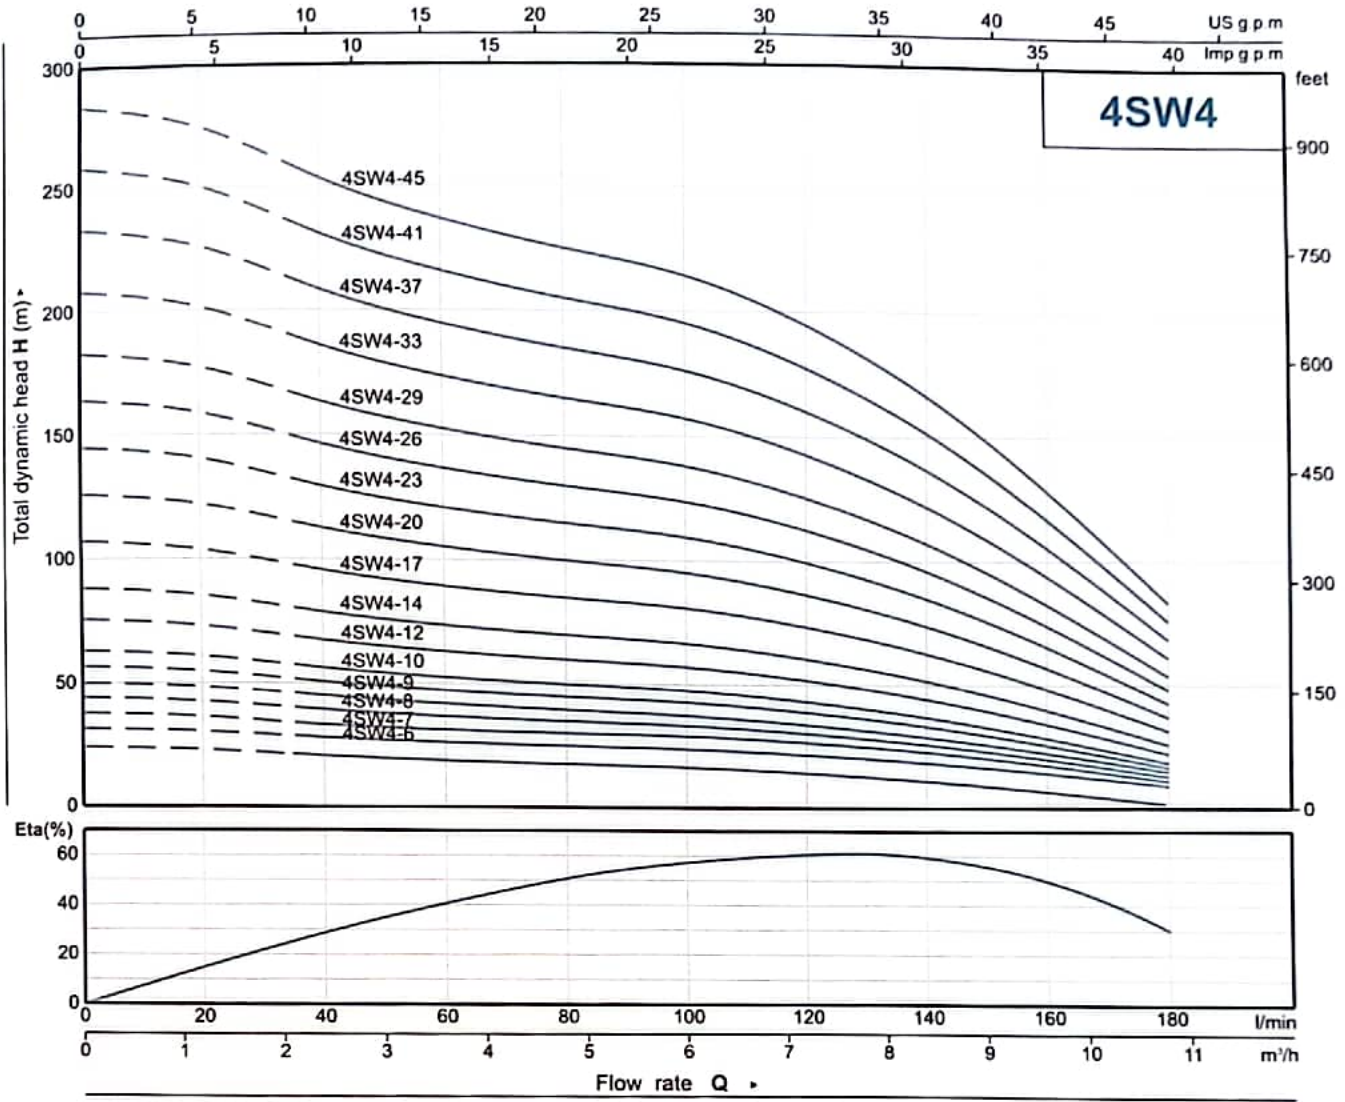

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY n≈2850 1/min														
1- 220 - 240V	3- 380 - 415V	kW	HP	Q	m³/h													
					l/min	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0		
4SWm4-5	4SW4-5	0.37	0.5	H(m)	44	42	41	40	39	36	33	29	24	19	14			
4SWm4-6	4SW4-7	0.55	0.75		58	56	55	54	52	49	44	39	33	26	18			
4SWm4-7	4SW4-8	0.75	1		73	70	69	67	65	61	55	48	41	32	23			
4SWm4-8	4SW4-9	0.92	1.25		87	84	82	81	78	73	66	58	49	39	27			
4SWm4-9	4SW4-9	1.1	1.5		102	98	96	94	91	85	77	68	57	45	32			
4SWm4-10	4SW4-10	1.3	1.75		116	113	110	107	104	97	88	77	65	51	37			
4SWm4-12	4SW4-12	1.5	2		131	127	124	121	117	109	99	87	73	58	41			
4SWm4-14	4SW4-14	1.8	2.5		152	148	144	141	136	128	115	102	85	67	48			
4SWm4-17	4SW4-17	2.2	3		174	169	165	161	156	146	132	116	98	77	55			
4SWm4-20	4SW4-20	2.6	3.5		203	197	192	188	182	170	154	135	114	90	64			
-	4SW4-23	3	4		232	225	220	215	208	195	176	155	130	103	73			
-	4SW4-26	3.7	5		261	253	247	242	234	219	198	174	146	116	82			
-	4SW4-29	4	5.5		290	281	275	268	260	243	220	194	163	128	92			
-	4SW4-33	5	7		327	316	309	302	293	274	248	218	183	144	103			
-	4SW4-37	5.5	7.5		363	352	344	335	325	304	275	242	203	160	115			
-	4SW4-41	7	10	406	394	385	376	364	341	308	271	228	180	128				
-	4SW4-45	7.5	10	450	436	426	416	403	377	341	300	252	199	142				