



HIGH PRESSURE CLEANER GENERATOR WATER PUMP AIR COMPRESSOR



ZHEJIANG ANLU CLEANING MACHINERY CO.,LTD.

Factory add:No.899 Jinqing West Avenue, Jin Qing
Lu Qiao Area, Taizhou City, Zhejiang Province,P.R. China
Office add:190# Industry Road, Jinqing, Luqiao Area,
Taizhou City, Zhejiang Province, P.R. China
Tel : 086-576-82885070 82898009
Fax: 086-576-82883983 P.C: 318058
<http://www.anlu.com> E-mail:market@anlu.com

20 years 1992-2012

ZHEJIANG ANLU CLEANING MACHINERY CO.,LTD.

www.anlu.com



HIGH PRESSURE CLEANER



GENERATOR



AIR COMPRESSOR



INTRODUCTION

ZHEJIANG ANLU CLEANING MACHINERY CO.,LTD

Founded in 1996, Zhejiang Anlu Cleaning Machinery Co.,Ltd., specialized in High Pressure Cleaner, is one of the largest professional manufacturers and exporters of High Pressure Cleaners, Air Compressor and Generator and etc. Our new factory covers an area of 100,000 square meters with 1200 staffs and 12 assembling lines. The annual volume reaches 60,000,000 USD.

After more than ten years development, our company has grown into an advanced and modern enterprise with effective management. Believing in Knowledge and continual development is power for a company, we continually innovate our products.our products are exported to more than 120 countries and have already obtained a respectable reputation.

Owing to the achievement in the technical knowledge and innovation, our company has been awarded as a new technological and patent model company nationally. The quality of the products is our consistent goal. we ensure that our products reach the most advanced level.

Besides certified by ISO9001:2008 international quality management system, nearly all the products of our company obtain other various international certifications such as GS, CE, UL, CUL, EMC and S. Our products gain reputation with peers and win the clients in many countries especially USA and Europe.

Face to the future development, Anlu will always maintain a close contact with customers, commit to developing high quality products to provide optimized service, realizing the harmonious development between Anlu and the society.



Machining working workshop



Production line



100% Enduring testing



Automatic die-casting workshop



Automatic injection workshop



Hose processing workshop



Production line



Products warehouse



Panorama



A



B ABW-VAH



C

- Features**
- 3 Axial-piston wobble-plate pump
 - Tempered stainless steel plungers
 - Total stop system
 - Built-in thermal protector
 - Handle for easy movement
 - Soft handle
 - Rubber wheel



- Standard accessories**
- Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)
- Optional accessories**
- Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VAH - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60HZ	10kgs	32x27x42cm (A) 32x27x42cm (B)	800/1600/2000pcs (A) 800/1600/2000pcs (B)
ABW -VAH - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60HZ	11kgs	35x30x42cm (C)	700/1400/1800pcs (C)



A



B ABW-VAB



C

- Features**
- 3 Axial-piston wobble-plate pump
 - Tempered stainless steel plungers
 - Total stop system
 - Built-in thermal protector
 - Handle for easy movement



- Standard accessories**
- Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle
- Optional accessories**
- Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VAB - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60HZ	9kgs	30x26x42cm (A) 30x26x42cm (B)	1000/2000/2500pcs (A) 1000/2000/2500pcs (B)
ABW -VAB - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60HZ	10kgs	32x28x42cm (C)	800/1600/1900pcs (C)



A

B ABW-VTB
APW-VTB

C

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement
Soft handle
Rubber wheel



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VTB - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	30x33x53cm	524/1048/1270pcs
ABW -VTB - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	30x33x53cm	524/1048/1270pcs

Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
APW -VTB - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	35x35x55cm	384/780/910pcs
APW -VTB - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	35x35x55cm	384/780/910pcs
APW -VTB -110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	35x35x55cm	384/780/910pcs
APW -VTB -1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	35x35x55cm	384/780/910pcs
APW -VTB -1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	35x35x55cm	384/780/910pcs



A

B ABW-VQE

C

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VQE - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	27x24x52cm (A)	830/1720/1950pcs (A)
ABW -VQE - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	27x24x52cm (B)	830/1720/1950pcs (B)
							30x24x52cm (C)	740/1495/1750pcs (C)



A

B ABW-VY
APW-VY

C

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement
Storage of all acc.
Hose quick connection



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VY - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	30x35x88cm(A) 30x38x60cm(B) 30x35x60cm(C)	290/592/720pcs(A) 410/840/950pcs(B) 430/860/1000pcs(C)
ABW -VY - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs		
Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
APW -VY - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs		
APW -VY - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	30x35x88cm(A)	290/592/720pcs(A)
APW -VY - 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	30x38x60cm(B)	410/840/950pcs(B)
APW -VY - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	30x35x60cm(C)	430/860/1000pcs(C)
APW -VY - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs		



A

B ABW-VX
APW-VX

C

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement
Storage of all acc.
Hose quick connection



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
ABW -VX - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	32x31x90cm(A)	310/620/705pcs(A)
ABW -VX - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	32x32x60cm(B/C)	460/930/1064pcs(B/C)
Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Model								
APW -VX - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs		
APW -VX - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	32x31x90cm(A)	310/620/705pcs(A)
APW -VX - 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	32x32x60cm(B/C)	460/930/1064pcs(B/C)
APW -VX - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs		
APW -VX - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs		



A

B

ABW-VP
APW-VP

C

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-VQB
APW-VQB

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Soft handle



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Built in detergent tank

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VP - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	34x33x84cm(A) 37x33x57cm(B)	275/560/650pcs(A) 415/838/966pcs(B)
ABW -VP - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	35x33x57cm(C)	435/878/970pcs(C)
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VP - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	15kgs		
APW -VP - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	15kgs	34x33x84cm(A)	275/560/650pcs(A)
APW -VP - 110 (P)	110bar	165bar	6L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	37x33x57cm(B)	415/838/966pcs(B)
APW -VP - 1600A	1300psi		1.5GPM	13A	120V 60Hz	14kgs	35x33x57cm(C)	435/878/970pcs(C)
APW -VP - 1800A	1500psi		1.6GPM	13A	120V 60Hz	15kgs		

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VQB - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	37x36x77.5cm	270/565/655pcs
ABW -VQB - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	37x36x77.5cm	270/565/655pcs
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VQB - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	37x36x77.5cm	270/565/655pcs
APW -VQB - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	37x36x77.5cm	270/565/655pcs
APW -VQB - 110 (P)	110bar	165bar	6L/min	1900W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	37x36x77.5cm	270/565/655pcs
APW -VQB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	16kgs	37x36x77.5cm	270/565/655pcs
APW -VQB - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	37x36x77.5cm	270/565/655pcs



ABW-VAG



ABW-VQC



ABW-VXD



ABW-VU

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle, 5m water outlet pressure hose, 5m power cord with plug, water inlet screw, nozzle cleaning pin, Soap bottle

Optional accessories

Fix brush, Rotary brush, Turbo nozzle, Water inlet hose, Tap connector, HPC connector, Pipe cleaning hose, Patio cleaner

Carbon Brush Motor				KW		Kg	W x H x L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VAG - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	30x26x42cm	1000/2000/2500pcs
ABW - VAG - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	10kgs	30x26x42cm	1000/2000/2500pcs

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VQC - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	30.5x25.5x49.5cm	750/1600/1800pcs
ABW - VQC - 1300A	1300psi		1.5GPM	13A	120V 60Hz	6.5kgs	30.5x25.5x49.5cm	750/1600/1800pcs

Features

3 Axial-piston wobble-plate pump
Tempered stainless steel plungers
Total stop system
Built-in thermal protector
Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle, 5m water outlet pressure hose, 5m power cord with plug, water inlet screw, nozzle cleaning pin, Soap bottle

Optional accessories

Fix brush, Rotary brush, Turbo nozzle, Water inlet hose, Tap connector, HPC connector, Pipe cleaning hose, Patio cleaner

Carbon Brush Motor				KW		Kg	W x H x L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VXD - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	30.5x25.5x49.5cm	750/1600/1800pcs
ABW - VXD - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	30.5x25.5x49.5cm	750/1600/1800pcs

Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VU - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	30.5x25.5x49.5cm	750/1575/1710pcs
ABW - VU - 1300A	1300psi		1.5GPM	13A	120V 60Hz	6.5kgs	30.5x25.5x49.5cm	750/1575/1710pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-VB
APW-VB



ABW-VC

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VB - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	27x25.5x52cm	850/1800/1950pcs
ABW -VB - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	27x25.5x52cm	850/1800/1950pcs
ABW -VB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	27x25.5x52cm	850/1800/1950pcs
 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VB - 70 (P)	70bar	105bar	6.4L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11.5kgs	54.5x31x27cm	616/1216/1400pcs
APW -VB - 90 (P)	90bar	135bar	6.4L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12.5kgs	54.5x31x27cm	616/1216/1400pcs
APW -VB - 110 (P)	110bar	165bar	6.4L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	14kgs	54.5x31x27cm	616/1216/1400pcs
APW -VB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11.5kgs	54.5x31x27cm	616/1216/1400pcs
APW -VB - 1400A	1400psi		1.5GPM	13A	120V 60Hz	12.5kgs	54.5x31x27cm	616/1216/1400pcs
APW -VB - 1800A	1500psi		1.6GPM	13A	120V 60Hz	13kgs	54.5x31x27cm	616/1216/1400pcs
 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VC - 65 (P)	70bar	105bar	5L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	30.5x29x51cm	680/1400/1650pcs
ABW -VC - 1600A	1300psi		1.6GPM	11A	120V 60Hz	6kgs	30.5x29x51cm	680/1400/1650pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-VGS



APW-VM

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VGS - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	5.5kgs	26.5x20.5x45.5cm	1120/2600/2700pcs
ABW -VGS - 1600A	1300psi		1.5GPM	13A	120V 60Hz	5.5kgs	26.5x20.5x45.5cm	1120/2600/2700pcs
 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VM - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	48x32x30cm	588/1250/1460pcs
APW -VM - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	48x32x30cm	588/1250/1460pcs
APW -VM - 110 (P)	110bar	165bar	6L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	48x32x30cm	588/1250/1460pcs
APW -VM - 1600A	1300psi		1.5GPM	13A	120V 60Hz	12kgs	48x32x30cm	588/1250/1460pcs
APW -VM - 1800A	1500psi		1.6GPM	13A	120V 60Hz	13kgs	48x32x30cm	588/1250/1460pcs



APW-VSA



ABW-VSB
APW-VSB



ABW-VSC

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Rubber wheel

Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



 Carbon Brush Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VSC- 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	30x30x52cm	590/1180/1400pcs
ABW -VSC- 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6.5kgs	30x30x52cm	590/1180/1400pcs



 Carbon Brush Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -VSB- 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	80x35x30cm	330/680/790pcs
ABW -VSB- 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	80x35x30cm	330/680/790pcs

 Induction Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VSB- 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	85x37x33cm	270/545/642pcs
APW -VSB- 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	85x37x33cm	270/545/642pcs
APW -VSB- 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	85x37x33cm	270/545/642pcs
APW -VSB- 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	85x37x33cm	270/545/642pcs
APW -VSB- 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	85x37x33cm	270/545/642pcs



 Induction Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VSA- 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	100x38x38cm	200/408/478pcs
APW -VSA- 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	19kgs	100x38x38cm	200/408/478pcs
APW -VSA- 110 (P)	110bar	165bar	5.8L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	100x38x38cm	200/408/478pcs
APW -VSA- 130 (P)	130bar	195bar	7L/min	2500W	220V-240V 50Hz	22kgs	100x38x38cm	200/408/478pcs
APW -VSA- 150 (P)	150bar	225bar	6.8L/min	3000W	220V-240V 50Hz	24kgs	100x38x38cm	200/408/478pcs
APW -VSA- 1600A	1300psi		1.5GPM	13A	120V 60Hz	19kgs	100x38x38cm	200/408/478pcs
APW -VSA- 1800A	1500psi		1.6GPM	13A	120V 60Hz	20kgs	100x38x38cm	200/408/478pcs



ABW-VAC
APW-VAC

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



APW-VTA

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Soft handle
- Rubber wheel
- Universal wheel
- Brake
- Can change nozzle



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VAC - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	35x35x62cm	524/1048/1270pcs
ABW - VAC - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	35x35x62cm	524/1048/1270pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VAC - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	35x35x62cm	384/780/910pcs
APW - VAC - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	35x35x62cm	384/780/910pcs
APW - VAC - 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	35x35x62cm	384/780/910pcs
APW - VAC - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	35x35x62cm	384/780/910pcs
APW - VAC - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	35x35x62cm	384/780/910pcs

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VTA - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	53x40.5x59cm	165/330/440pcs
APW - VTA - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	53x40.5x59cm	165/330/440pcs
APW - VTA - 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	53x40.5x59cm	165/330/440pcs
APW - VTA - 1600A	1300psi		1.4GPM	13A	120V 60Hz	15kgs	53x40.5x59cm	165/330/440pcs
APW - VTA - 1800A	1500psi		1.4GPM	13A	120V 60Hz	17kgs	53x40.5x59cm	165/330/440pcs



APW-VZA

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Storage of all acc.
- Hose quick connection

Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Built in detergent tank

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VZA - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	19kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	19kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 110 (P)	110bar	165bar	5.8L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 130 (P)	130bar	195bar	7L/min	2500W	220V-240V 50Hz	22kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 150 (P)	150bar	225bar	6.8L/min	3000W	220V-240V 50Hz	24kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 1600A	1300psi		1.5GPM	13A	120V 60Hz	19kgs	38x38x55cm	360/744/8508pcs
APW -VZA - 1800A	1500psi		1.6GPM	13A	120V 60Hz	20kgs	38x38x55cm	360/744/8508pcs



APW-VZB

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Storage of all acc.
- Hose quick connection

Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Built in detergent tank

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VZB - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 110 (P)	110bar	165bar	5.8L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	21kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 130 (P)	130bar	195bar	7L/min	2500W	220V-240V 50Hz	23kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 150 (P)	150bar	225bar	6.8L/min	3000W	220V-240V 50Hz	25kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	20kgs	38x38x55cm	360/744/8508pcs
APW -VZB - 1800A	1500psi		1.6GPM	13A	120V 60Hz	21kgs	38x38x55cm	360/744/8508pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Rubber wheel



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



APW-VKA



APW-VKB

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VKA /B - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	19kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 110 (P)	110bar	165bar	6L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 130 (P)	130bar	195bar	7L/min	2500W	220V-240V 50Hz	22kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 150 (P)	150bar	225bar	7L/min	3000W	220V-240V 50Hz	24kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 1600A	1300psi		1.5GPM	13A	120V 60Hz	19kgs	88x36.5x38cm	210/450/550pcs
APW -VKA /B - 1800A	1500psi		1.6GPM	13A	120V 60Hz	20kgs	88x36.5x38cm	210/450/550pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Rubber wheel



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



APW-VQA



APW-VO

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VQA /VO - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	19kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 110 (P)	110bar	165bar	5.8L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 130 (P)	130bar	195bar	7L/min	2500W	220V-240V 50Hz	22kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 150 (P)	150bar	225bar	6.8L/min	3000W	220V-240V 50Hz	24kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 1600A	1300psi		1.5GPM	13A	120V 60Hz	19kgs	101x37.5x36.5cm	200/408/478pcs
APW -VQA /VO - 1800A	1500psi		1.6GPM	13A	120V 60Hz	20kgs	101x37.5x36.5cm	200/408/478pcs



APW-VHB

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement
- Rubber wheel



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Built in detergent tank

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



A

APW-VH

B



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Induction Motor				Kw		Kg	W H L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VHB - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60HZ	16kgs	40x37x84cm	260/530/530pcs
APW -VHB - 90 (P)	90bar	135bar	5.8L/min	1400W	220V-240V 50Hz 100V-127V50/60HZ	17kgs	40x37x84cm	260/530/530pcs
APW -VHB - 110 (P)	110bar	165bar	6L/min	2000W	220V-240V 50Hz 100V-127V50/60HZ	18kgs	40x37x84cm	260/530/530pcs
APW -VHB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	40x37x84cm	260/530/530pcs
APW -VHB - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	40x37x84cm	260/530/530pcs

Induction Motor				Kw		Kg	W H L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VH - 70 (P)	70bar	105bar	6L/min	1400W	220V-240V 50Hz 100V-127V50/60HZ	15kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 90 (P)	90bar	135bar	6L/min	1600W	220V-240V 50Hz 100V-127V50/60HZ	16kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 110 (P)	110bar	165bar	6L/min	2000W	220V-240V 50Hz 100V-127V50/60HZ	17kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 130 (P)	130bar	195bar	6.5L/min	2500W	220V-240V 50Hz	24kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 150 (P)	150bar	225bar	7.5L/min	3000W	220V-240V 50Hz	25kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	84x36x38.5cm	240/480/560pcs
APW - VH - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	84x36x38.5cm	240/480/560pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-VRB
APW-VRB

ABW-VQD
APW-VQD

 Carbon Brush Motor	 Working Pressure	 Max Pressure	 Flow	 Kw	 Voltage	 Kg	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model								
ABW -VRB /VQD - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	10.5kgs	84.5x37x31.5cm	270/580/680pcs
ABW -VRB /VQD - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	84.5x37x31.5cm	270/580/680pcs
ABW -VRB /VQD - 110 (P)	110bar	165bar	6.6L/min	2400W	220V-240V 50Hz	11.5kgs	84.5x37x31.5cm	270/580/680pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VRB /VQD - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	84.5x37x31.5cm	270/580/680pcs
APW -VRB /VQD - 90 (P)	90bar	135bar	5.8L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	84.5x37x31.5cm	270/580/680pcs
APW -VRB /VQD - 110 (P)	110bar	165bar	5.7L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	84.5x37x31.5cm	270/580/680pcs
APW -VRB /VQD - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	84.5x37x31.5cm	270/580/680pcs
APW -VRB /VQD - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	84.5x37x31.5cm	270/580/680pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



A

ABW-VA
APW-VA

B

 Carbon Brush Motor	 Working Pressure	 Max Pressure	 Flow	 Kw	 Voltage	 Kg	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model								
ABW -VA - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	84x35x33cm	300/610/715pcs
ABW -VA - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	10kgs	84x35x33cm	300/610/715pcs
ABW -VA - 110 (P)	110bar	165bar	6.6L/min	2400W	220V-240V 50Hz	10kgs	84x35x33cm	300/610/715pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW -VA - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	15kgs	84x35x33cm	300/610/715pcs
APW -VA - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	84x35x33cm	300/610/715pcs
APW -VA - 110 (P)	110bar	165bar	6L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	84x35x33cm	300/610/715pcs
APW -VA - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	84x35x33cm	300/610/715pcs
APW -VA - 1800A	1500psi		1.6GPM	13A	120V 60Hz	16kgs	84x35x33cm	300/610/715pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



A

ABW-VG
APW-VG



B

 Carbon Brush Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VG - 70 (P)	70bar	105bar	5.5L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	83x38x37cm	240/504/585pcs
ABW - VG - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	10kgs	83x38x37cm	240/504/585pcs
ABW - VG - 110 (P)	110bar	165bar	6.6L/min	2400W	220V-240V 50Hz	10.5kgs	83x38x37cm	240/504/585pcs

 Induction Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VG - 70 (P)	70bar	105bar	6L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	83x38x37cm	240/504/585pcs
APW - VG - 90 (P)	90bar	135bar	6L/min	1600W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	83x38x37cm	240/504/585pcs
APW - VG - 110 (P)	110bar	165bar	6L/min	2000W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	83x38x37cm	240/504/585pcs
APW - VG - 130 (P)	130bar	195bar	6.5L/min	2500W	220V-240V 50Hz	24kgs	83x38x37cm	240/504/585pcs
APW - VG - 150 (P)	150bar	225bar	7.5L/min	3000W	220V-240V 50Hz	25kgs	83x38x37cm	240/504/585pcs
APW - VG - 1600A	1300psi		1.5GPM	13A	120V 60Hz	17kgs	83x38x37cm	240/504/585pcs
APW - VG - 1800A	1500psi		1.6GPM	13A	120V 60Hz	19kgs	83x38x37cm	240/504/585pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



A

APW-VF



B

 Induction Motor	 Working Pressure	 Max Pressure	 Flow	 Power	 Voltage	 Weight	 Box dimensions Dimensions	 Load Quantity (20/40/40HQ)
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VF - 70 (P)	70bar	105bar	6L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 90 (P)	90bar	135bar	6L/min	1600W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 110 (P)	110bar	165bar	6L/min	2000W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 130 (P)	130bar	195bar	6.5L/min	2500W	220V-240V 50Hz	24kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 150 (P)	150bar	225bar	7.5L/min	3000W	220V-240V 50Hz	25kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 1600A	1300psi		1.5GPM	13A	120V 60Hz	17kgs	91.5x35.5x35cm	216/456/548pcs
APW - VF - 1800A	1500psi		1.6GPM	13A	120V 60Hz	19kgs	91.5x35.5x35cm	216/456/548pcs



ABW-VE
APW-VE

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-120
APW-120

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

 Carbon Brush Motor				 Kw		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - VE - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	92x35x38cm	240/486/580pcs
ABW - VE - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	10kgs	92x35x38cm	240/486/580pcs
ABW - VE - 110 (P)	110bar	165bar	6.6L/min	2400W	220V-240V 50Hz	10.5kgs	92x35x38cm	240/486/580pcs
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VE - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	15kgs	92x35x38cm	240/486/580pcs
APW - VE - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	92x35x38cm	240/486/580pcs
APW - VE - 110 (P)	110bar	165bar	6L/min	1900W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	92x35x38cm	240/486/580pcs
APW - VE - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	92x35x38cm	240/486/580pcs
APW - VE - 1800A	1500psi		1.6GPM	13A	120V 60Hz	17kgs	92x35x38cm	240/486/580pcs

 Carbon Brush Motor				 Kw		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - 120 - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	82x31x40cm	280/592/660pcs
ABW - 120 - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	10kgs	82x31x40cm	280/592/660pcs
ABW - 120 - 110 (P)	110bar	165bar	6.6L/min	2400W	220V-240V 50Hz	10kgs	82x31x40cm	280/592/660pcs
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - 120C (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	15kgs	82x31x40cm	280/592/660pcs
APW - 120D (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	82x31x40cm	280/592/660pcs
APW - 120E (P)	110bar	165bar	6L/min	1900W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	82x31x40cm	280/592/660pcs
APW - 120 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	82x31x40cm	280/592/660pcs
APW - 120 - 1800A	1500psi		1.6GPM	13A	120V 60Hz	16kgs	82x31x40cm	280/592/660pcs



APW-150

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle,(Built in detergent tank)

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Induction Motor				KW		Kg	W H L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - 150D (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	17kgs	99x34x40cm	210/453/510pcs
APW - 150E (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	99x34x40cm	210/453/510pcs
APW - 150F (P)	110bar	165bar	6L/min	1900W	220V-240V 50Hz 100V-127V50/60Hz	20kgs	99x34x40cm	210/453/510pcs
APW - 150B (P)	130bar	195bar	6.5L/min	2200W	220V-240V 50Hz	24kgs	99x34x40cm	210/453/510pcs
APW - 150C (P)	150bar	225bar	7L/min	2900W	220V-240V 50Hz	25kgs	99x34x40cm	210/453/510pcs
APW - 150 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	16kgs	99x34x40cm	210/453/510pcs
APW - 150 - 1800A	1500psi		1.6GPM	13A	120V 60Hz	19kgs	99x34x40cm	210/453/510pcs



APW-230

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Built in detergent tank

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Induction Motor				KW		Kg	W H L	
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - 230C (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	15kgs	53.5x52x36cm	264/572/620pcs
APW - 230D (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	16kgs	53.5x52x36cm	264/572/620pcs
APW - 230E (P)	110bar	165bar	6L/min	1900W	220V-240V 50Hz 100V-127V50/60Hz	18kgs	53.5x52x36cm	264/572/620pcs
APW - 230 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	15kgs	53.5x52x36cm	264/572/620pcs
APW - 230 - 1800A	1500psi		1.6GPM	13A	120V 60Hz	16kgs	53.5x52x36cm	264/572/620pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



APW-2200

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - 2200C (P)	70bar	105bar	6.4L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	13.5kgs	54x38x34cm	390/810/900pcs
APW - 2200D (P)	90bar	135bar	6.4L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	14.5kgs	54x38x34cm	390/810/900pcs
APW - 2200E (P)	110bar	165bar	6.4L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	15.5kgs	54x38x34cm	390/810/900pcs
APW - 2200 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	13.5kgs	54x38x34cm	390/810/900pcs
APW - 2200 - 1800A	1500psi		1.6GPM	13A	120V 60Hz	14.5kgs	54x38x34cm	390/810/900pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-HG
APW-HG

 Carbon Brush Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - HG - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	52x32x31cm	539/1078/1300pcs
ABW - HG - 90 (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	52x32x31cm	539/1078/1300pcs
ABW - HG - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	52x32x31cm	539/1078/1300pcs

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - HG - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	52x32x31cm	539/1078/1300pcs
APW - HG - 90 (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	52x32x31cm	539/1078/1300pcs
APW - HG - 110 (P)	110bar	165bar	6.4L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	52x32x31cm	539/1078/1300pcs
APW - HG - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11kgs	52x32x31cm	539/1078/1300pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



ABW-HB



APW-HA



ABW-70P



ABW-700



ABW-2100G/3100G
QL-2100G/3100G



ABW-HF

 Carbon Brush Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW -HB - 70 (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	42x27.5x27cm	970/1940/2235pcs
ABW -HB - 90 (P)	90bar	135bar	6L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	7kgs	42x27.5x27cm	970/1940/2235pcs
ABW -HB - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	42x27.5x27cm	970/1940/2235pcs
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - HA - 70 (P)	70bar	105bar	6.4L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11.5kgs	43x37x30cm	616/1216/1400pcs
APW - HA - 90 (P)	90bar	135bar	6.4L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12.5kgs	43x37x30cm	616/1216/1400pcs
APW - HA - 100 (P)	100bar	150bar	6L/min	1700W	220V-240V 50Hz 100V-127V50/60Hz	14kgs	43x37x30cm	616/1216/1400pcs
APW - HA - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11.5kgs	43x37x30cm	616/1216/1400pcs
APW - HA - 1800A	1500psi		1.5GPM	13A	120V 60Hz	13kgs	43x37x30cm	616/1216/1400pcs
 Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - 70 (P)	70bar	105bar	5L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	39x27x27cm	1038/2098/2450pcs
ABW - 70P - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	39x27x27cm	1038/2098/2450pcs

 Carbon Brush Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - 700 (P)	70bar	105bar	5L/min	1400W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	39x24x27cm	1100/2300/2700pcs
ABW - 700 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	39x24x27cm	1100/2300/2700pcs
 Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - 2100G (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	39x27x27cm	960/1920/2160pcs
ABW - 3100G (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	39x27x27cm	960/1920/2160pcs
ABW - G - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	39x27x27cm	960/1920/2160pcs
 Induction Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
QL - 2100G (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	39x27x26cm	1080/2160/2230pcs
QL - 3100G (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	39x27x26cm	1080/2160/2230pcs
QL - G - 1600A	1300psi		1.3GPM	13A	120V 60Hz	11kgs	39x27x26cm	1080/2160/2230pcs
 Carbon Brush Motor	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - HF - 70 (P)	70bar	105bar	5.5L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	40x25x28cm	1008/2160/2500pcs
ABW - HF - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	40x25x28cm	1008/2160/2500pcs

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner

Features

- 3 Axial-piston wobble-plate pump
- Tempered stainless steel plungers
- Total stop system
- Built-in thermal protector
- Handle for easy movement



Standard accessories

Spray gun with adjustable spray nozzle,5m water outlet pressure hose,5m power cord with plug,water inlet screw, nozzle cleaning pin,Soap bottle

Optional accessories

Fix brush,Rotary brush,Turbo nozzle,Water inlet hose, Tap connector,HPC connector,Pipe cleaning hose, Patio cleaner



QL-2100E/3100E



QL-2100D/3100D



APW-40/70/90




APW-VD



ABW-2100F/3100F
QL-2100F/3100F

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
QL - 2100E (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	38x27x26cm	950/1920/2230pcs
QL - 3100E (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	38x27x26cm	950/1920/2230pcs
QL - E - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11kgs	38x27x26cm	950/1920/2230pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
QL - 2100D (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	38x27x25cm	1008/2122/2400pcs
QL - 3100D (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	38x27x25cm	1008/2122/2400pcs
QL - D - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11kgs	38x27x25cm	1008/2122/2400pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - 40 (P)	40bar	60bar	4.6L/min	700W	220V-240V 50Hz 100V-127V50/60Hz	9kgs	44x36x31.5cm	728/1526/1800pcs
APW - 70 (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	44x36x31.5cm	728/1526/1800pcs
APW - 90 (P)	90bar	135bar	6.4L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	44x36x31.5cm	728/1526/1800pcs
APW - 40 - 1600A	1300psi		1.5GPM	13A	120V 60Hz	10kgs	44x36x31.5cm	728/1526/1800pcs

 Induction Motor				 KW		 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
APW - VD - 70 (P)	70bar	105bar	6.4L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	11kgs	45x30x30.5cm	960/1928/2200pcs
APW - VD - 90 (P)	90bar	135bar	6.4L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	45x30x30.5cm	960/1928/2200pcs
APW - VD - 110 (P)	110bar	165bar	6.4L/min	1800W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	45x30x30.5cm	960/1928/2200pcs
APW - VD - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11kgs	45x30x30.5cm	960/1928/2200pcs
APW - VD - 1800A	1500psi		1.6GPM	13A	120V 60Hz	13kgs	45x30x30.5cm	960/1928/2200pcs
 Carbon Brush Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ABW - 2100F (P)	70bar	105bar	5.7L/min	1650W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	52x32x31cm	539/1078/1300pcs
ABW - 3100F (P)	90bar	135bar	5.7L/min	1850W	220V-240V 50Hz 100V-127V50/60Hz	6kgs	52x32x31cm	539/1078/1300pcs
ABW - F - 1600A	1300psi		1.5GPM	13A	120V 60Hz	6kgs	52x32x31cm	539/1078/1300pcs
 Induction Motor								
Model	Working Pressure	Max Pressure	Flow	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
Q L - 2100F (P)	70bar	105bar	6L/min	1200W	220V-240V 50Hz 100V-127V50/60Hz	12kgs	52x32x31cm	539/1078/1300pcs
Q L - 3100F (P)	90bar	135bar	6L/min	1500W	220V-240V 50Hz 100V-127V50/60Hz	13kgs	52x32x31cm	539/1078/1300pcs
Q L - F - 1600A	1300psi		1.5GPM	13A	120V 60Hz	11kgs	52x32x31cm	539/1078/1300pcs

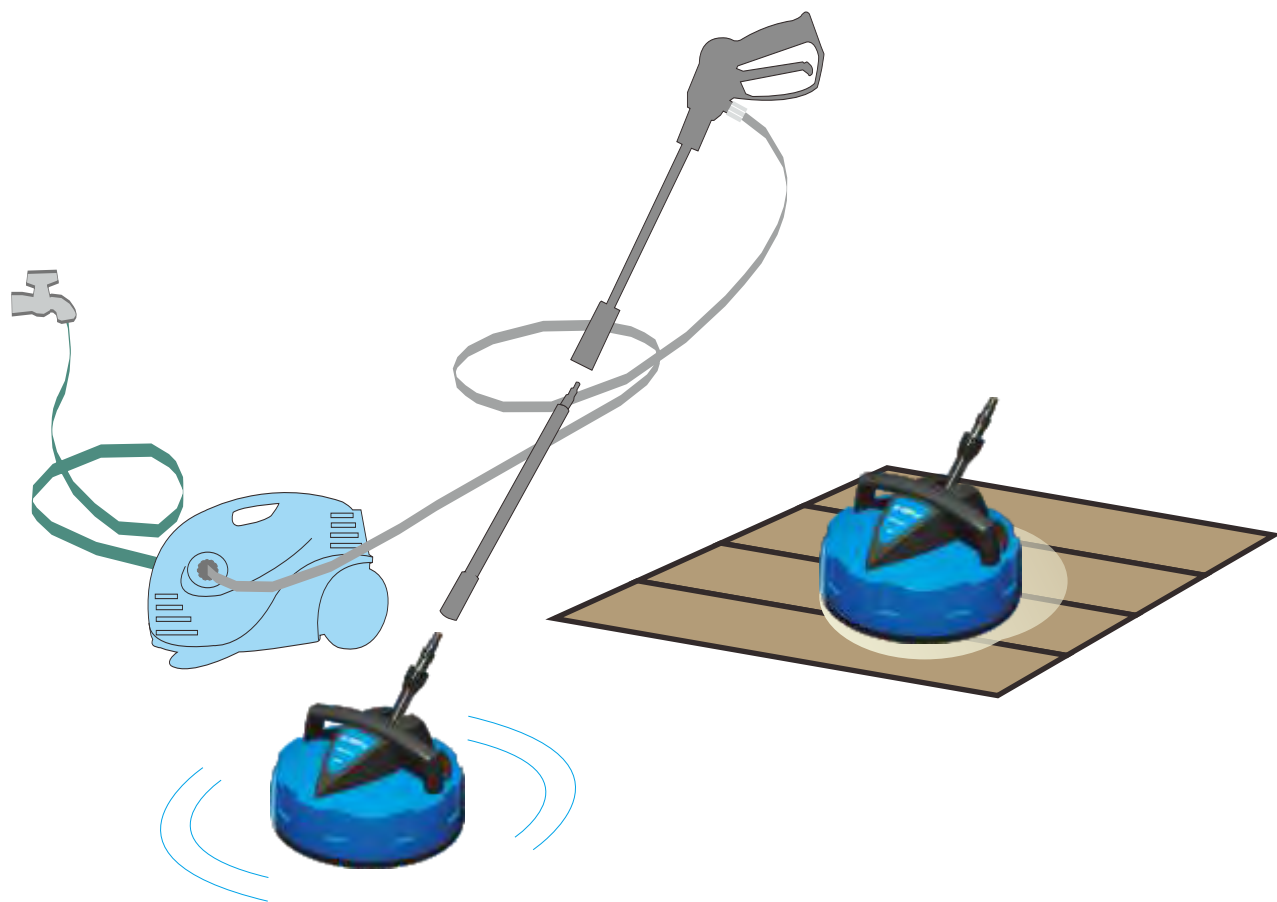

AL-EDDY-C



AL-EDDY-E

Model	Working Width	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
AL-EDDY - C	280mm	1.3kgs	46x20x32cm	1000/ 2000/ 2500pcs
AL-EDDY - E	200mm	0.8kgs	25x20x30cm	2500/5000/6000pcs



ACCESSORY KIT



Rotary brush



Fix brush




Turbo lance



HPC connector



Tap connector

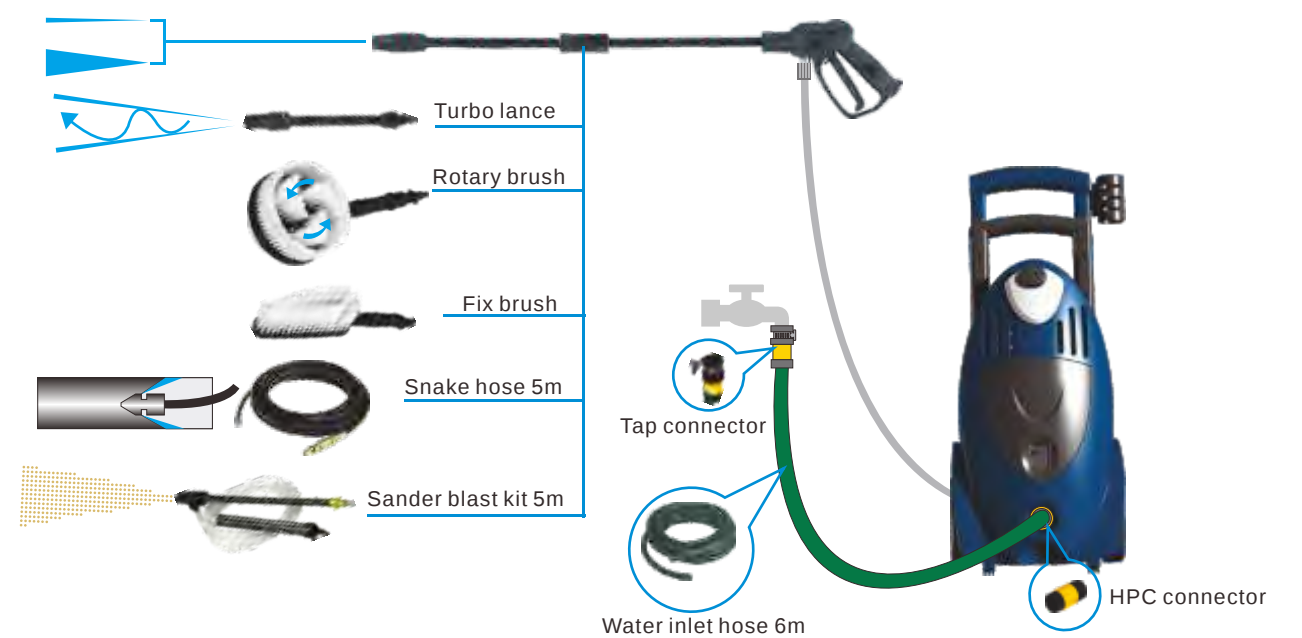



Standard accessories

- Spray Gun with Adjustable Spray Nozzle
- 5M Water Outlet Hose
- Power Cord With Cigarette Lighter Connector



ACW-13L

PORTABLE WASH MACHINE FOR CAR

								
Model	Permanent Magnet Motor	Working Pressure	Flow	Power	Voltage(DC)	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ACW - 13L		7bar(101psi)	2.0L/min	80W	12V	5KG	46.5x29x36.5cm	1000/2000/2200pcs



AGW-180B



AGW-180C



AGW-180D



AGW-90C



AGW-120



AGW-150/180/200

Engin	Power				 Kw	 Kg		
Model	Working Pressure	Max Pressure	Flow	Power	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)	
AGW - 180B	180bar(2610psi)	200bar(2900psi)	9.1L/min(2.4GPM)	6.5HP	30kgs	60x60x50cm	85/190/210pcs	
AGW - 180C	180bar(2610psi)	200bar(2900psi)	9.1L/min(2.4GPM)	6.5HP	35kgs	60x60x50cm	85/190/210pcs	
AGW - 180D	180bar(2610psi)	200bar(2900psi)	9.1L/min(2.4GPM)	6.5HP	35kgs	60x60x50cm	85/190/210pcs	
AGW - 90C	90bar(1305psi)	120bar(1740psi)	6.3L/min(1.66GPM)	2.6HP	16kgs	51.5x38x59.5cm	260/520/576pcs	
AGW - 120	120bar(1740psi)	140bar(2030psi)	5.3L/min(1.4GPM)	4HP	16kgs	47x38x53cm	260/520/576pcs	
AGW - 150	150bar(2200psi)	180bar(2610psi)	8L/min(2.11GPM)	5.5HP	30kgs	63x62x54cm	102/204/220pcs	
AGW - 180	180bar(2610psi)	200bar(2900psi)	9.3L/min(2.45GPM)	6.5HP	35kgs	63x62x54cm	102/204/220pcs	
AGW - 200	200bar(2900psi)	220bar(3190psi)	9.3L/min(2.45GPM)	7HP	35kgs	63x62x54cm	102/204/220pcs	



AP -C280PA



AP -C299PA

 Induction Motor			 Kw	
Model	Working Pressure	Flow	Power	Voltage
AP -C280PA	70bar	9L/min	1300W	220V-240V 50Hz

 Induction Motor			 Kw	
Model	Working Pressure	Flow	Power	Voltage
AP -C299PA	70bar	9L/min	1300W	220V-240V 50Hz



AP -E55A
AP -E58A



AP -E998A
AP -E999A
AP -E999B

 Induction Motor			 Kw	
Model	Working Pressure	Flow	Power	Voltage
AP -E55A	40bar	16L/min	1800W	220V-240V 50Hz
AP -E58A	40bar	40L/min	3000W	380V 50Hz

 Induction Motor			 Kw	
Model	Working Pressure	Flow	Power	Voltage
AP -E998A	40bar	20L/min	100W	220V-240V 50Hz
AP -E999A	50bar	30L/min	3000W	380V 50Hz
AP -E999B	70bar	40L/min	5500W	380V 50Hz



AGD1000



AGD2000

DIGITAL
GENERATOR



	MODEL	AGD1000	AGD2000
GENERATOR	TYPE	Magnet Motor ,single-phase	Magnet Motor ,single-phase
	VOLTAGE ADJUSTMENT	Inverter	Inverter
	RATED AC VOLTAGE	110,120,220,230,240	110,120,220,230,240
	POWER FACTOR	1	1
	FREQUENCY (Hz)	50/60	50/60
	MAX.AC OUTPUT (Kw)	1.05	2.0
	RATED AC OUTPUT (Kw)	0.90	1.6
	MODEL	143F	158F
ENGINE	TYPE	Wind-Cooling, Four Stroke	Wind-Cooling, Four Stroke
	DISPLACEMENT (ML)	53.5	105
	MAX.OUTPUT (KW/rpm)	1.3/5500	2.2/5000
	FUEL	Unleaded, Gasoline	Unleaded, Gasoline
	FUEL TANK (L)	2.5	3.0
	WORK DURATION (h)	6.0	6.8
	ENGINE OIL	SAE10W40	SAE10W40
	ENGINE OIL TANK (L)	0.5	0.5
	IGNITION SYSTEM	T.C.I	T.C.I
	START SYSTEM	Manual	Manual
	OPERATING SOUND RATE (7M) dB(A)	57	59
	MODEL	143F	158F
MEASUREMENT WEIGHT	LxWxH (mm)	500 x 280 x 460	560 x 330 x 460
	N.W. (KG)	15	22
STANDARD ACCESSORIES		THROTTLE SWITCH, AC SOCKET,DC OUTPUT LEAD	THROTTLE SWITCH, AC SOCKET,DC OUTPUT LEAD
CONTAINER LOADING	20/40/40HQ	470/ 970/1150	350/730/740



GASOLINE
GENERATOR



	MODEL	AG-HA-950D	
GENERATOR	TYPE	Brushless, Rotating Magnetic Field. Self-Excitation, Single-Phase	
	VOLTAGE ADJUSTMENT	Capacitor	
	RATED AC VOLTAGE	110,120,220,230,240	
	POWER FACTOR	1	
	FREQUENCY (Hz)	50	60
	MAX.AC OUTPUT (Kw)	0.7	0.8
	RATED AC OUTPUT (Kw)	0.63	0.7
	MODEL	1E45F	
ENGINE	TYPE	Single cylinder,Air-cooled,Two stroke	
	DISPLACEMENT (ML)	63	
	MAX.OUTPUT (HP/rpm)	2/3600	
	FUEL	Gasoline: Engine Oil 40:1	
	FUEL TANK (L)	2.5	
	WORK DURATION (h)	4	
	ENGINE OIL	Two Stroke Oil	
	ENGINE OIL TANK (L)	\	
	IGNITION SYSTEM	C.D.I	
	START SYSTEM	Recoil starter	
	OPERATING SOUND RATE (7M) dB(A)	60	
	MODEL	1E45F	
MEASUREMENT WEIGHT	LxWxH (mm)	505x360x440	
	N.W. (KG)	18	
STANDARD ACCESSORIES		AC BREAKER, AC SOCKET	
CONTAINER LOADING	20/40/40HQ	330/720/720	



AG-HA-950



AG-HA-950B



AG-HA-950C

GASOLINE
GENERATOR



	MODEL	AG-HA-950	AG-HA-950B	AG-HA-950C
GENERATOR	TYPE	Brushless, Rotating Magnetic Field. Self-Excitation, Single-Phase		
	VOLTAGE ADJUSTMENT	Capacitor		
	RATED AC VOLTAGE	110,120,220,230,240		
	POWER FACTOR	1		
	FREQUENCY (Hz)	50	60	
	MAX.AC OUTPUT (Kw)	0.8	0.9	
	RATED AC OUTPUT (Kw)	0.7	0.75	
	MODEL	1E45F		
ENGINE	TYPE	Single cylinder,Air-cooled,Two stroke		
	DISPLACEMENT (ML)	63		
	MAX.OUTPUT (HP/rpm)	2/3600		
	FUEL	Gasoline: Engine Oil 50:1		
	FUEL TANK (L)	4.2		
	WORK DURATION (h)	6.3		
	ENGINE OIL	Two Stroke Oil		
	ENGINE OIL TANK (L)	\		
	IGNITION SYSTEM	C.D.I		
	START SYSTEM	Recoil starter		
	OPERATING SOUND RATE (7M) dB(A)	60		
	MEASUREMENT	LxWxH (mm)		
WEIGHT		370x350x325		
	N.W. (KG)	18		
STANDARD ACCESSORIES		AC BREAKER, AC SOCKET		
	CONTAINER LOADING	20/40/40HQ		
		720/1400/1400		



GASOLINE
GENERATOR



	MODEL	AG-HA-2500		AG-HA-3000		AG-HA-3800		AG-HA-6000		AG-HA-6500		AG-HA-7500	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field. Self-Excitation, Single-Phase											
	VOLTAGE ADJUSTMENT	AVR											
	RATED AC VOLTAGE	110,120,220,230,240											
	POWER FACTOR	1											
	FREQUENCY (Hz)	50	60	50	60	50	60	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	27	3.0	4.0	4.5	5.0	5.5	6	6.6
	MODEL	168F		168F-1		170F		188F		188F		190F	
ENGINE	TYPE	Single cylinder,Air-cooled,Four stroke,OHV											
	DISPLACEMENT (ML)	163		196		208		389		389		420	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600		13/3600		13/3600		14/3600	
	FUEL	Unleaded, Gasoline											
	FUEL TANK (L)	15						25					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40											
	ENGINE OIL TANK (L)	0.6						1.1					
	IGNITION SYSTEM	T.C.I											
	START SYSTEM	Manual /Electric start											
	OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69	70	72	72	74	73	75
MEASUREMENT WEIGHT	LxWxH (mm)	620 x 450 x 480						690 x 520 x 580					
	N.W. (KG)	36		37		39		80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET											
CONTAINER LOADING	20/40/40HQ	225/475/475						136/288/288					



GASOLINE
GENERATOR

TUV CE EPA EUI CARB

	MODEL	AG-HA-2500B		AG-HA-3000B		AG-HA-3800B	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field, Self-Excitation, Single-Phase					
	VOLTAGE ADJUSTMENT	AVR					
	RATED AC VOLTAGE	110,120,220,230,240					
	POWER FACTOR	1					
	FREQUENCY (Hz)	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	2.7	3.0
	MODEL	168F		168F-1		170F	
ENGINE	TYPE	Single cylinder,Air-cooled,Four stroke,OHV					
	DISPLACEMENT (ML)	163		196		208	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600	
	FUEL	Unleaded, Gasoline					
	FUEL TANK (L)	15					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0
	ENGINE OIL	SAE15W40					
	ENGINE OIL TANK (L)	0.6					
	IGNITION SYSTEM	T.C.I					
	START SYSTEM	Manual /Electric start					
	OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69
MEASUREMENT	LxWxH (mm)	620 x 450 x 480					
WEIGHT	N.W. (KG)	3.6		37		3.9	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET					
CONTAINER LOADING	20/40/40HQ	172/344/430					



GASOLINE
GENERATOR

CE EUI

	MODEL	AG-HA-6000B		AG-HA-6500B		AG-HA-7500B	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field, Self-Excitation, Single-Phase					
	VOLTAGE ADJUSTMENT	AVR					
	RATED AC VOLTAGE	110,120,220,230,240					
	POWER FACTOR	1					
	FREQUENCY (Hz)	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	4.0	4.5	5.0	5.5	6	6.6
	MODEL	188F				190F	
ENGINE	TYPE	Single cylinder,Air-cooled,Four stroke,OHV					
	DISPLACEMENT (ML)	389				420	
	MAX.OUTPUT (HP/rpm)	13/3600				14/3600	
	FUEL	Unleaded, Gasoline					
	FUEL TANK (L)	25					
	WORK DURATION (h)	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40					
	ENGINE OIL TANK (L)	1.1					
	IGNITION SYSTEM	T.C.I					
	START SYSTEM	Manual /Electric start					
	OPERATING SOUND RATE (7M) dB(A)	70	72	72	74	73	75
MEASUREMENT WEIGHT	LxWxH (mm)	690 x 520 x 580					
	N.W. (KG)	80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET					
CONTAINER LOADING	20/40/40HQ	112/256/256					



GASOLINE
GENERATOR



	MODEL	AG-HA-2500C		AG-HA-3000C		AG-HA-3800C		AG-HA-6000C		AG-HA-6500C		AG-HA-7500C	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field. Self-Excitation, Single-Phase											
	VOLTAGE ADJUSTMENT	AVR											
	RATED AC VOLTAGE	110,120,220,230,240											
	POWER FACTOR	1											
	FREQUENCY (Hz)	50	60	50	60	50	60	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	27	3.0	4.0	4.5	5.0	5.5	6	6.6
ENGINE	MODEL	168F		168F-1		170F		188F		188F		190F	
	TYPE	Single cylinder,Air-cooled,Four stroke,OHV											
	DISPLACEMENT (ML)	163		196		208		389		389		420	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600		13/3600		13/3600		14/3600	
	FUEL	Unleaded, Gasoline											
	FUEL TANK (L)	15						25					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40											
	ENGINE OIL TANK (L)	0.6						1.1					
	IGNITION SYSTEM	T.C.I											
	START SYSTEM	Manual /Electric start											
OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69	70	72	72	74	73	75	
MEASUREMENT	LxWxH (mm)	620 x 450 x 480						690 x 520 x 580					
WEIGHT	N.W. (KG)	36		37		39		80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET											
CONTAINER LOADING	20/40/40HQ	172/344/430						112/256/256					



GASOLINE
GENERATOR



	MODEL	AG-HA-2500D		AG-HA-3000D		AG-HA-3800D		AG-HA-6000D		AG-HA-6500D		AG-HA-7500D	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field. Self-Excitation, Single-Phase											
	VOLTAGE ADJUSTMENT	AVR											
	RATED AC VOLTAGE	110,120,220,230,240											
	POWER FACTOR	1											
	FREQUENCY (Hz)	50	60	50	60	50	60	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	27	3.0	4.0	4.5	5.0	5.5	6	6.6
ENGINE	MODEL	168F		168F-1		170F		188F		188F		190F	
	TYPE	Single cylinder,Air-cooled,Four stroke,OHV											
	DISPLACEMENT (ML)	163		196		208		389		389		420	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600		13/3600		13/3600		14/3600	
	FUEL	Unleaded, Gasoline											
	FUEL TANK (L)	15						25					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40											
	ENGINE OIL TANK (L)	0.6						1.1					
	IGNITION SYSTEM	T.C.I											
	START SYSTEM	Manual /Electric start											
OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69	70	72	72	74	73	75	
MEASUREMENT	LxWxH (mm)	620 x 450 x 480						690 x 520 x 580					
WEIGHT	N.W. (KG)	36		37		39		80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET											
CONTAINER LOADING	20/40/40HQ	172/344/430						112/256/256					



GASOLINE
GENERATOR

CE EPA EUII CARB

	MODEL	AG-HA-2500E		AG-HA-3000E		AG-HA-3800E	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field, Self-Excitation, Single-Phase					
	VOLTAGE ADJUSTMENT	AVR					
	RATED AC VOLTAGE	110,120,220,230,240					
	POWER FACTOR	1					
	FREQUENCY (Hz)	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	2.7	3.0
	MODEL	168F		168F-1		170F	
ENGINE	TYPE	Single cylinder,Air-cooled,Four stroke,OHV					
	DISPLACEMENT (ML)	163		196		208	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600	
	FUEL	Unleaded, Gasoline					
	FUEL TANK (L)	15					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0
	ENGINE OIL	SAE15W40					
	ENGINE OIL TANK (L)	0.6					
	IGNITION SYSTEM	T.C.I					
	START SYSTEM	Manual /Electric start					
	OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69
MEASUREMENT	LxWxH (mm)	620 x 450 x 480					
WEIGHT	N.W. (KG)	36		37		39	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET					
CONTAINER LOADING	20/40/40HQ	172/344/430					



GASOLINE
GENERATOR

CE EUII

	MODEL	AG-HA-6000E		AG-HA-6500E		AG-HA-7500E	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field, Self-Excitation, Single-Phase					
	VOLTAGE ADJUSTMENT	AVR					
	RATED AC VOLTAGE	110,120,220,230,240					
	POWER FACTOR	1					
	FREQUENCY (Hz)	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	4.0	4.5	5.0	5.5	6	6.6
ENGINE	MODEL	188F				190F	
	TYPE	Single cylinder,Air-cooled,Four stroke,OHV					
	DISPLACEMENT (ML)	389				420	
	MAX.OUTPUT (HP/rpm)	13/3600				14/3600	
	FUEL	Unleaded, Gasoline					
	FUEL TANK (L)	25					
	WORK DURATION (h)	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40					
	ENGINE OIL TANK (L)	1.1					
	IGNITION SYSTEM	T.C.I					
	START SYSTEM	Manual /Electric start					
MEASUREMENT	OPERATING SOUND RATE (7M) dB(A)	70	72	72	74	73	75
	LxWxH (mm)	690 x 520 x 580					
	WEIGHT	80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET					
CONTAINER LOADING	20/40/40HQ	112/256/256					



GASOLINE
GENERATOR

TUV CE EPA EUI CARB

	MODEL	AG-HA-2500F		AG-HA-3000F		AG-HA-3800F		AG-HA-6000F		AG-HA-6500F		AG-HA-7500F	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field. Self-Excitation, Single-Phase											
	VOLTAGE ADJUSTMENT	AVR											
	RATED AC VOLTAGE	110,120,220,230,240											
	POWER FACTOR	1											
	FREQUENCY (Hz)	50	60	50	60	50	60	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	27	3.0	4.0	4.5	5.0	5.5	6	6.6
ENGINE	MODEL	168F		168F-1		170F		188F		188F		190F	
	TYPE	Single cylinder,Air-cooled,Four stroke,OHV											
	DISPLACEMENT (ML)	163		196		208		389		389		420	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600		13/3600		13/3600		14/3600	
	FUEL	Unleaded, Gasoline											
	FUEL TANK (L)	15						25					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40											
	ENGINE OIL TANK (L)	0.6						1.1					
	IGNITION SYSTEM	T.C.I											
	START SYSTEM	Manual /Electric start											
OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69	70	72	72	74	73	75	
MEASUREMENT	LxWxH (mm)	620 x 450 x 480						690 x 520 x 580					
WEIGHT	N.W. (KG)	36		37		39		80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET											
CONTAINER LOADING	20/40/40HQ	172/344/430						112/256/256					



GASOLINE
GENERATOR

TUV CE EPA EUI CARB

	MODEL	AG-HA-2500H		AG-HA-3000H		AG-HA-3800H		AG-HA-6000H		AG-HA-6500H		AG-HA-7500H	
GENERATOR	TYPE	With Brush, Rotating Magnetic Field. Self-Excitation, Single-Phase											
	VOLTAGE ADJUSTMENT	AVR											
	RATED AC VOLTAGE	110,120,220,230,240											
	POWER FACTOR	1											
	FREQUENCY (Hz)	50	60	50	60	50	60	50	60	50	60	50	60
	MAX.AC OUTPUT (Kw)	2.2	2.5	2.8	3.0	3.0	3.3	4.5	5.0	5.5	6.0	6.6	7.2
	RATED AC OUTPUT (Kw)	2.0	2.3	2.5	2.8	2.7	3.0	4.0	4.5	5.0	5.5	6	6.6
ENGINE	MODEL	168F		168F-1		170F		188F		188F		190F	
	TYPE	Single cylinder,Air-cooled,Four stroke,OHV											
	DISPLACEMENT (ML)	163		196		208		389		389		420	
	MAX.OUTPUT (HP/rpm)	5.5/3600		6.5/3600		7/3600		13/3600		13/3600		14/3600	
	FUEL	Unleaded, Gasoline											
	FUEL TANK (L)	15						25					
	WORK DURATION (h)	10.6	8.8	7.2	6.8	6.8	6.0	8.5	7.1	8.2	6.8	7.0	6.0
	ENGINE OIL	SAE15W40											
	ENGINE OIL TANK (L)	0.6						1.1					
	IGNITION SYSTEM	T.C.I											
	START SYSTEM	Manual /Electric start											
OPERATING SOUND RATE (7M) dB(A)	65	68	65	68	67	69	70	72	72	74	73	75	
MEASUREMENT WEIGHT	LxWxH (mm)	620 x 450 x 480						690 x 520 x 580					
	N.W. (KG)	36		37		39		80		83		85	
STANDARD ACCESSORIES		OIL LEVEL METER, AC VOLTMETER, AC BREAKER, AC VOLTAGE SWITCH, AC SOCKET											
CONTAINER LOADING	20/40/40HQ	225/475/475						136/288/288					



AG-HA-2600
AG-HA-3500
AG-HA-5500




AG-HA-5500T

DIESEL
GENERATOR

CE EPA EUI CARB

MODEL	AG-HA-2600		AG-HA-3500		AG-HA-5500		AG-HA-5500T	
Rated Frequency(Hz)	50	60	50	60	50	60	50	60
Voltage (V)	230	230/115	230	230/115	230	230/115	230	230/115
Current (A)	7.4	7.8/17.4	12.2	13/26	19.6	21.7/43.5	19.6	21.7/43.5
Rated output (kW)	1.7	2.0	2.8	3.0	4.5	5.0	4.5	5.0
Rated speed (rpm)	3000	3600	3000	3600	3000	3600	3000	3600
Current (DC)	12V 8.3A							
Power Factor (cos)	1.0							
Phase	Single phase							
Noise Level at 7m dB [dB(A)@7m]	72~77						70~74	
Dimensions (LxWxH)(mm)	575x400x530		575x400x530		575x400x530		910x530x740	
Structural style	Economical type						Silent type	
Coupling Pattern	Straight Shaft Coupling							
Engine Model	FP170F/E		FP178F/E		FP186F/E		FP186F/E	
Type	Single-cylinder, Vertical type, Air cooled, 4 stroke diesel engine							
Displacement (ml)	211		296		406		406	
Compression ratio	20:1				19:1		19:1	
Rated power(kW/rpm)	2.5/3000,2.8/3600		3.7/3000,4.0/3600		5.7/3000,6.3/3600		5.7/3000,6.3/3600	
Starting system	Recoil starter/Electric starter						Electric starter	
Direction of rotation (face to fly wheel)	Clockwise						Clockwise	
Fuel	0#(summer) 10#(winter) diesel							
Lube Oil model	SAE10W30(CC degree or more)							
Low Oil warning system	Yes							
Excitation System	Controlled Constant Self-excitation							
Tank Capacity (L)	12.5						12.5	
Dry weight (kg)	58		65		100		165	

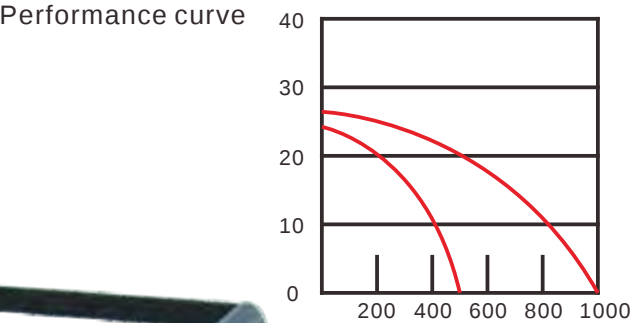

- VACUUM PUMP SET
- The impeller and casing are made of wear resistant cast iron
- Powered by 4-stroke,OHV gasoline engine with oil alert system for automatic shut-off protection against low oil state

GASOLINE
WATER PUMP

CE EPA EUI CARB

	MODEL	AGP-20	AGP-30	AGP-20CX	AGP-30CX
Water pump	Diameter of suction pipe(mm)	50 (2'')	80 (3'')	50 (2'')	80 (3'')
	Max. head(m)	26	28	26	28
	Suction height(m)	8	8	8	8
	Flow(m3/h)	33	60	33	60
	Max. permissible Pressure(MPa)	0.25	0.25	0.25	0.25
Engine	Model	AL168F	AL168F-1	AL168F	AL168F-1
	Rated output power(Kw/min)	3.4/3600	4.0/3600	3.4/3600	4.0/3600
	Continuous operating hours(h)	2.8	2.4	2.8	2.4
	Fuel tank capacity(L)	3.0	3.0	3.0	3.0
Sets	Dimensions (mm)	490X375X392	505X375X430	490X375X392	505X375X430
	Dry weight(kg)	27	30	27	30

CX---OIL ALERT SYSTEM



AAC-WY2 AAC-WX2



AAC-WC2 AAC-WD2



AAC-WE2 AAC-WF2



ACY-24



AAC-LE2



AAC-WA15



AAC-WP2



AAC-WM2



AAC-DE2



AAC-WN2



AAC-50QP



Model	Working Pressure	Speed	Displacement	Tank	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
AAC-WY2	8bar(115psi)	2850RPM	206L/min 7CFM	24L(6.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	28kgs	58x28x62cm	240/480/640pcs
AAC-WX2	8bar(115psi)	2850RPM	206L/min 7CFM	50L(13.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	32kgs	80x33x66cm	147/303/303pcs
AAC-WC2	8bar(115psi)	2850RPM	206L/min 7CFM	24L(6.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	28kgs	58x28x62cm	240/480/640pcs
AAC-WD2	8bar(115psi)	2850RPM	206L/min 7CFM	50L(13.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	32kgs	80x36x66cm	147/303/303pcs
AAC-WE2	8bar(115psi)	2850RPM	206L/min 7CFM	24L(6.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	25kgs	58.5x27.5x58.5cm	300/640/640pcs
AAC-WF2	8bar(115psi)	2850RPM	206L/min 7CFM	50L(13.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	32kgs	79.5x33x64cm	147/303/303pcs
AAC-WP2	8bar(115psi)	2850RPM	201L/min 7CFM	24L(6.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	25kgs	59x28x63cm	216/432/608pcs
AAC-WM2	8bar(115psi)	2850RPM	206L/min 7CFM	24L(6.3GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	30kgs	48x38x83cm	144/288/432pcs
AAC-DE2	8bar(115psi)	2850RPM	206L/min 7CFM	15L(4GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	27kgs	48x45x50cm	300/600/700pcs



Model	Working Pressure	Speed	Displacement	Tank	Power	Voltage	Weight	Box dimensions Dimensions	Load Quantity (20/40/40HQ)
ACY-24	8bar(115psi)	2850RPM	206L/min 7CFM	24L(6.3GAL)	1.4Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	20kgs	59x29x63cm	240/639/639pcs
AAC-LE2	8bar(115psi)	2850RPM	206L/min 7CFM	15L(4GAL)	1.5Kw(2HP)	220V-240V 50Hz 100V-127V50/60Hz	27kgs	43x43x68cm	300/600/720pcs
AAC-WA15	8bar(115psi)	2850RPM	155L/min 5.5CFM	7.5L(2GAL)	1.1Kw(1.5HP)	220V-240V 50Hz 100V-127V50/60Hz	15kgs	53x22x49cm	600/1200/1500pcs
AAC-WN2	8bar(115psi)	2850RPM	412L/min 14CFM	50L(13.3GAL)	2.2Kw(3HP)	220V-240V 50Hz	43.2kgs	77x38x74cm	126/270/270pcs
AAC-50QP	8bar(115psi)	1000RPM	525L/min 18.5CFM	50L(13.3GAL)	6.5HP	/	100kgs	110x50x88cm	40/80/120pcs



Construction reasonable, excellent ability
The best performance ratio



Intelligent controlling, monitoring in time
Saving energy, high efficiency, no-worry
High efficiency, long using life, environmental protection
World wild supplying



RP series 7.5W-75KW unmovable screw compressor specifications

Model	RP-10A	RP-15A	RP-20A	RP-25A	RP-30A	RP-40A	RP-50A	RP-60A	RP-75A	RP-100A
排气压力 Exha. air pressure M ³ /min/mpa	1.1/0.7	1.7/0.7	2.2/0.7	3.2/0.7	3.8/0.7	5.2/0.7	6.5/0.7	8.2/0.7	10.4/0.7	13.8/0.7
	1.0/0.8	1.6/0.8	2.1/0.8	3.0/0.8	3.6/0.8	4.9/0.8	6.3/0.8	7.5/0.8	9.8/0.8	13.0/0.8
	0.9/1.0	1.5/1.0	2.0/1.0	2.6/1.0	3.3/1.0	4.3/1.0	5.7/1.0	6.8/1.0	8.5/1.0	11.9/1.0
	0.7/1.3	1.2/1.3	1.8/1.3	2.4/1.3	2.9/1.3	4.0/1.3	5.0/1.3	6.0/1.3	7.5/1.3	10.3/1.3
环境温度 Ambient Temp. °C	-5 ~ 45 °C									
冷却方式 Cooling way	风冷/ 水冷 Water cooling / Air cooling									
排气温度 Exhausted Temp. °C	风冷 ≤ 环境温度 + 10 °C air cooling ≤ environ. Temp. + 10 °C									
驱动方式 Driven way	皮带 / 直联 Belt / Direct									
启动方式 Start way	Y-▲ 降压启动 Y-▲ presser drop start									
电机功率 Power KW	7.5	11	15	18.5	22	30	37	45	55	75
噪音 Noise dB	61			69			73			
出口管径 Outlet Dia.	G1"	G3/4"	G3/4"	G1"	G1"	G1 1/2"	G1 1/2"	G1 1/2"	G1 1/2"	G2"
重量 weight kg	490	330	350	550	550	630	850	900	1050	1750
外型尺寸 mm Dimension	长L	1200	1100	1100	1050	1050	1050	1600	1600	1630
	宽W	720	770	770	850	850	850	1100	1100	1400
	高H	1450	1040	1040	1320	1320	1320	1520	1520	1600

Remark: volume flow checking accords on GB3853(ISO1217); noise checking accords on GB4980 standards(ISO2151)
Voltage 380V, phase 50HZ

90KW-355KW unmovable screw compressor specifications

型号Model	RP-125A	RP-150A	RP-175A	RP-200A	RP-250A	RP-300A	RP-350A	RP-400A	RP-480A
排气压力 Exha. air pressure M ³ /min/mpa	16.3/0.7	21.7/0.7	24.3/0.7	28.0/0.7	33.8/0.7	38.7/0.7	43.2/0.7	56.2/0.7	64.0/0.7
	15.7/0.8	20.5/0.8	23.5/0.8	26.4/0.8	31.6/0.8	35.9/0.8	42.3/0.8	53.5/0.8	61.8/0.8
	14.1/1.0	17.0/1.0	20.1/1.0	23.6/1.0	28.3/1.0	32.4/1.0	38.5/1.0	49.8/1.0	54.2/1.0
	13.0/1.3	16.1/1.3	17.8/1.3	21.8/1.3	25.6/1.3	28.9/1.3	35.0/1.3	43.2/1.3	48.0/1.3
环境温度 Ambient Temp. °C	-5 ~ 45 °C								
冷却方式 Cooling way	风冷/ 水冷 Water cooling / Air cooling								
排气温度 Exhausted Temp. °C	风冷 ≤ 环境温度 + 10 °C air cooling ≤ environ. Temp. + 10 °C 水冷 ≤ 38 °C water cooling ≤ 38 °C								
驱动方式 Driven way	皮带 / 直联 Belt / Direct								
启动方式 Start way	Y-▲ 启动 Y-▲ presser drop start 软启动可选 Soft start optional								
电机功率 Power KW	90	110	132	160	185	220	250	315	355
噪音 Noise dB	≤ 78 ± 2				≤ 83 ± 2				
出口管径 Outlet Dia.	DN65	DN65	DN65	DN80	DN80	DN100	DN100	DN100	DN125
重量 weight kg	2450	2760	3500	3800	4750	4900	5100	6800	7200
外型尺寸 mm Dimension	长L	2500	2500	2500	2800	2800	3030	3030	3230
	宽W	1600	1650	1650	1950	1950	2500	2500	2500
	高H	2090	1800	1800	1800	1800	1900	1900	2100

Remark: volume flow checking accords on GB3853(ISO1217); noise checking accords on GB4980 standards(ISO2151)
Voltage 380V, phase 50HZ, 6KV, 10KV high voltage can be optional ;